

WINGITS®

STANDARD™

Superior Poly-Painted Stainless Steel Grab Bar

Model: WGB5YS

Part Numbers:

WGB5YS12xx
12" Painted Finish

WGB5YS16xx
16" Painted Finish

WGB5YS18xx
18" Painted Finish

WGB5YS24xx
24" Painted Finish

WGB5YS30xx
30" Painted Finish

WGB5YS32xx
32" Painted Finish

WGB5YS36xx
36" Painted Finish

WGB5YS42xx
42" Painted Finish

WGB5YS48xx
48" Painted Finish

Options For Polyester Paint "xx" (Finish):

BO = BONE, BI = BISCUIT, ORB = OIL RUBBED BRONZE, BLKORB = MATTE BLACK, WH = WHITE



Features:

- All parts are 18-8 (304) Stainless Steel - tubing is 18-Gauge (1.2mm)
- Mounting Flanges are 3" (76mm) in diameter, 3/32" (2.5mm) thick, HeliArc welded to the tubing
- Mounting Flanges have 5 holes for attachment to WINGITS® Fasteners or adequate blocking
- Meets or Exceeds all Building Codes, ADA Criteria, 2010 ADAAG and 2017 ANSI Standards
- Polyester Fibrous Paint (indoor/outdoor) - MADE in USA



BONE



BISCUIT



OIL-RUBBED BRONZE




MATTE BLACK




WHITE

MECHANICAL DATA
Length: see part number
Height: 3" (76mm)
Depth: 2.75" (70mm)
Tube Diameter: 1.25" (32mm)
COMPOSITION
18-8 (304) Stainless Steel
INSTALLATION
Includes Stainless Steel Screws to Install into Adequate Structural Blocking . Can Be Installed with WINGITS® Fasteners when blocking is not available.
RECOMMENDED INTEGRATION
Install into Adequate Structural Blocking or with WINGITS® Fasteners.

Front

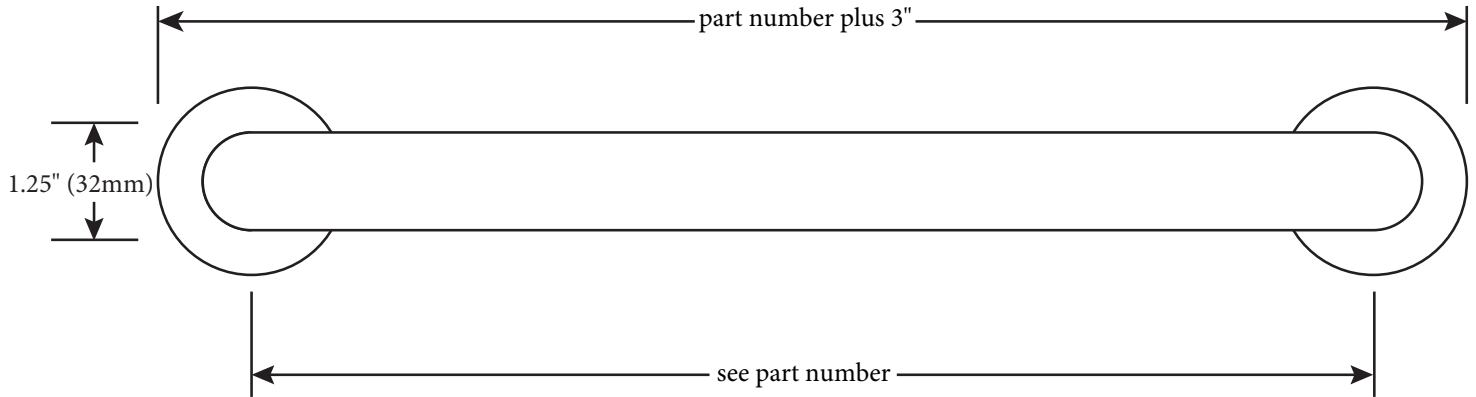


Top

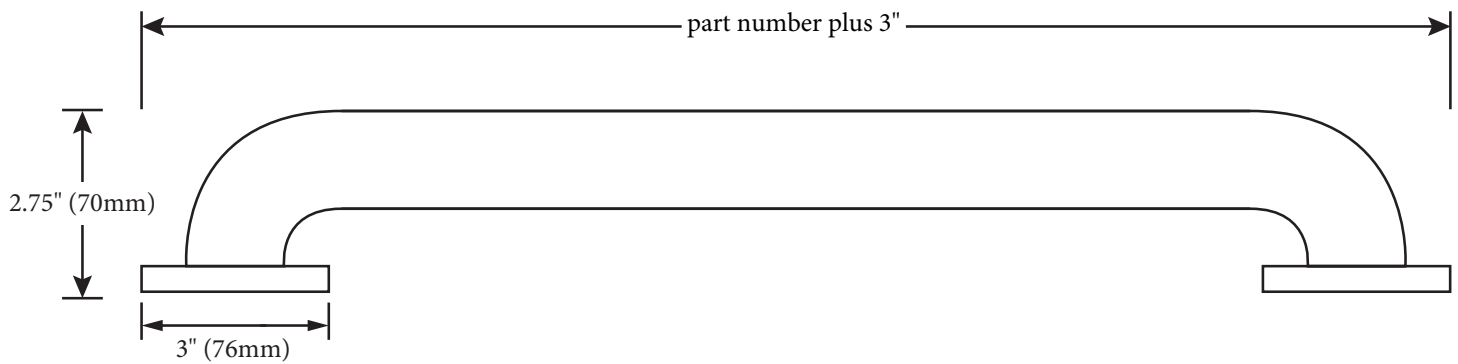


Holes - 0.25" (6mm)
 Slots - 0.25" (6mm) x 0.5" (13mm)
 (used when installing with the
 WINGITS® Grab Bar Fastening
 System)
 Bolt Circle is 2.3125" (59mm)

**Grab Bar
 Mounting Flange**

Grab Bar Tube

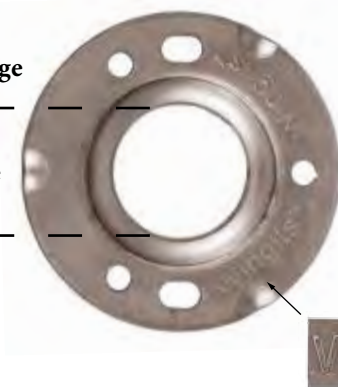

Snap-on Cover

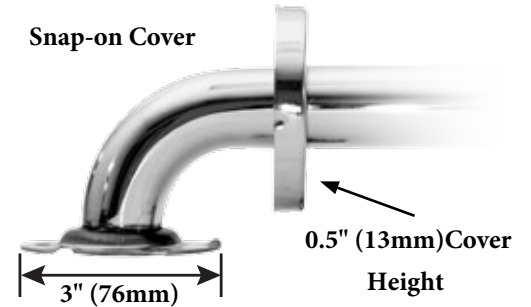

Included Hardware



2.5" S/S Screw (6)

**Optional Hardware
 (Sold Separately)**



WINGITS® Grab Bar
 Fastener (GBW40) (2)



WINGITS® Reverse Grab Bar
 Fastener (SRGBW40) (2)



WINGITS® Structurally
 Engineered (RES) Grab Bar
 Fastener (RESGBW35) (2)