WINGITS®

STANDARDTM

Stainless Steel Grab Bar

Model: WGB5

Part Numbers:

WGB5PS12 WGB5SS12 12" Polished Finish 12" Satin Finish

WGB5PS16 WGB5SS16 16" Polished Finish 16" Satin Finish

 WGB5PS18
 WGB5SS18

 18" Polished Finish
 18" Satin Finish

 WGB5PS24
 WGB5SS24

24" Polished Finish 24" Satin Finish WGB5PS30 WGB5SS30

30" Polished Finish

WGB5PS32

32" Polished Finish

30" Satin Finish

WGB5SS32

32" Satin Finish

32" Satin Finish

WGB5PS36 WGB5SS36 36" Polished Finish 36" Satin Finish


WGB5PS42 WGB5SS42 42" Polished Finish 42" Satin Finish

WGB5PS48 WGB5SS48 48" Polished Finish 48" Satin Finish



Features:

- Tri-linear Buff Technology Results in Unmatched Mirror Finish
- All parts are 18-8 (304) Stainless Steel tubing is 18-Gauge (1.2mm)
- Mounting Flanges are 3" (76mm) in diameter, 3/32" (2.5mm) thick, HeliArc welded to the tubing
- Mounting Flanges have 5 holes for attachment to WINGITS® Fasteners or Adequate Structural Blocking
- Meets or Exceeds all Building Codes, ADA Criteria, 2010 ADAAG and 2017 ANSI Standards
- 800lb Load Capability



MECHANICAL DATA

Length: see part number Height: 3" (76mm) Depth: 2.75" (70mm) Tube Diameter: 1.25" (32mm)

COMPOSITION

18-8 (304) Stainless Steel

INSTALLATION


Includes Stainless Steel Screws to Install into **Adequate Structural Blocking**. Can Be Installed with WINGITS® Fasteners when blocking is not available.

RECOMMENDED INTEGRATION


Install into Adequate Structural Blocking or with WINGITS® Fasteners.

SpecSheet 20190307

Front

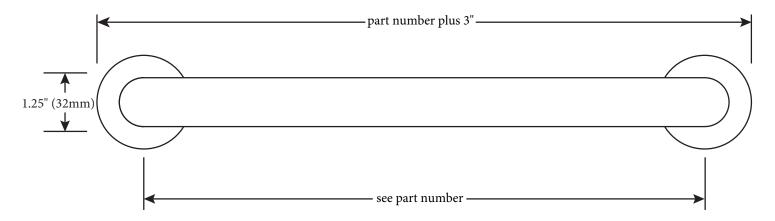

Top

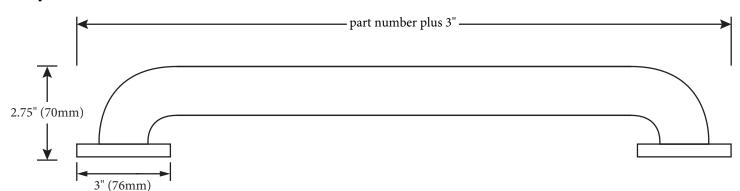

Holes - 0.25" (6mm) Slots - 0.25" (6mm) x 0.5" (13mm) (used when installing with the WINGITS* Grab Bar Fastening System) Bolt Circle is 2.3125" (59mm)



Included Hardware



Optional Hardware (Sold Separately)



WINGITS* Reverse Grab Bar Fastener (SRGBW40) (2)



WINGITS* Structurally Engineered (RES) Grab Bar Fastener (RESGBW35) (2)

WINGITS® Grab Bar

Fastener (GBW40) (2)